



REVISIONS				
REV	ECO	DESCRIPTION	DWN	DATE
A	-	Initial release.	AMH	07-17-07
B	-	Updated temp spec and labeling.	JL	08-17-09
C	-	Increased OD, changed ink design and ITO glass thickness to 1.8mm.	JL	08-15-11

### FRONT VIEW

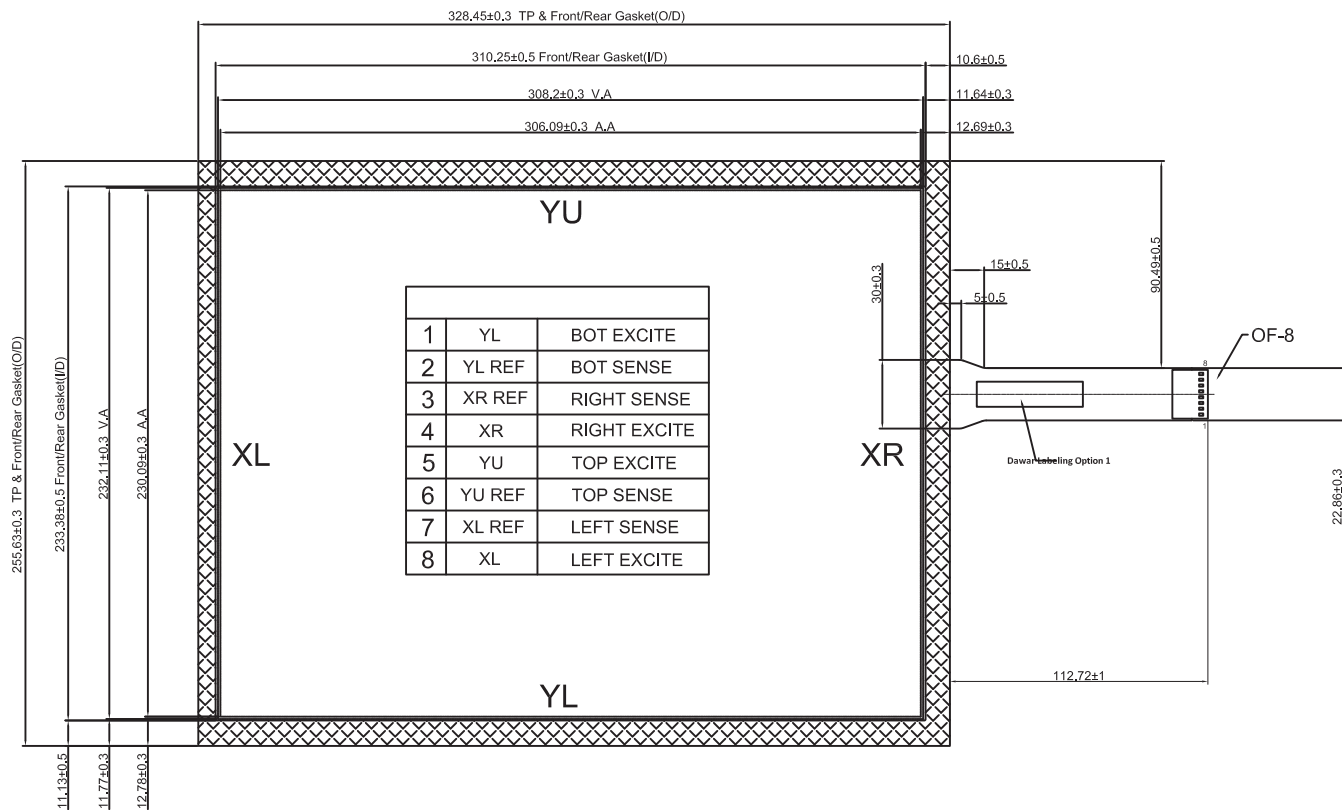

#### NOTES:

- Operation Temperature: -20°C ~ +60°C  
Storage Temperature: -20°C ~ +70°C
- Overlay Colour :Black
- Life Time: > 5,000,000 times
- Linearity: ≤ 1.5%
- ITO Film: Anti-Glare Hard Coated & Anti-Newton Ring  
Sheet Resistance: 400±100Ω/square  
ITO Glass: Sheet Resistanc:400±100 Ω/square
- Tail Type: Gold plated FPC
- Tolerances not marked: ±0.3
- All materials and components must be RoHS compliant
- No material is allowed to be larger than the glass size except for the tail

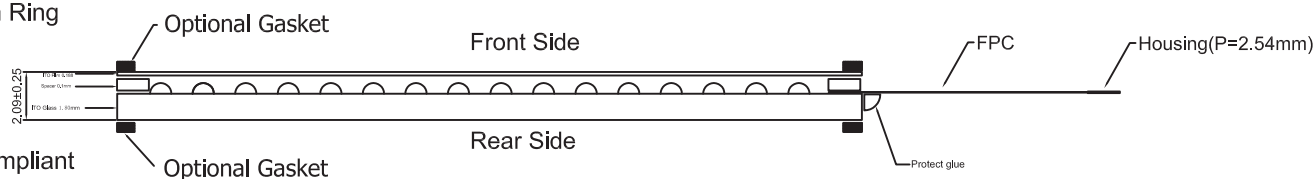

 1016 North Lincoln Avenue, Pittsburgh, PA 15233 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958 e-mail: sales@dawar.com - www.dawar.com <small>THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.</small>	CUSTOMER P/N Standard product offering	REV -	DAWAR ENGINEERING P/N FG8_15.1-00001			REV C
	MANUFACTURING NO.	REV	UNIT mm [inch]	TOLERANCE ±0.30 [0.010] unless specified	SHEET 1 OF 1	DRAWN BY Jason Liao
DESCRIPTION 15.1" 8-Wire Resistive Touch Screen						