


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	10-31-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH
C	Revised "Optional Gasket"	09-17-09	AMH

FRONT VIEW

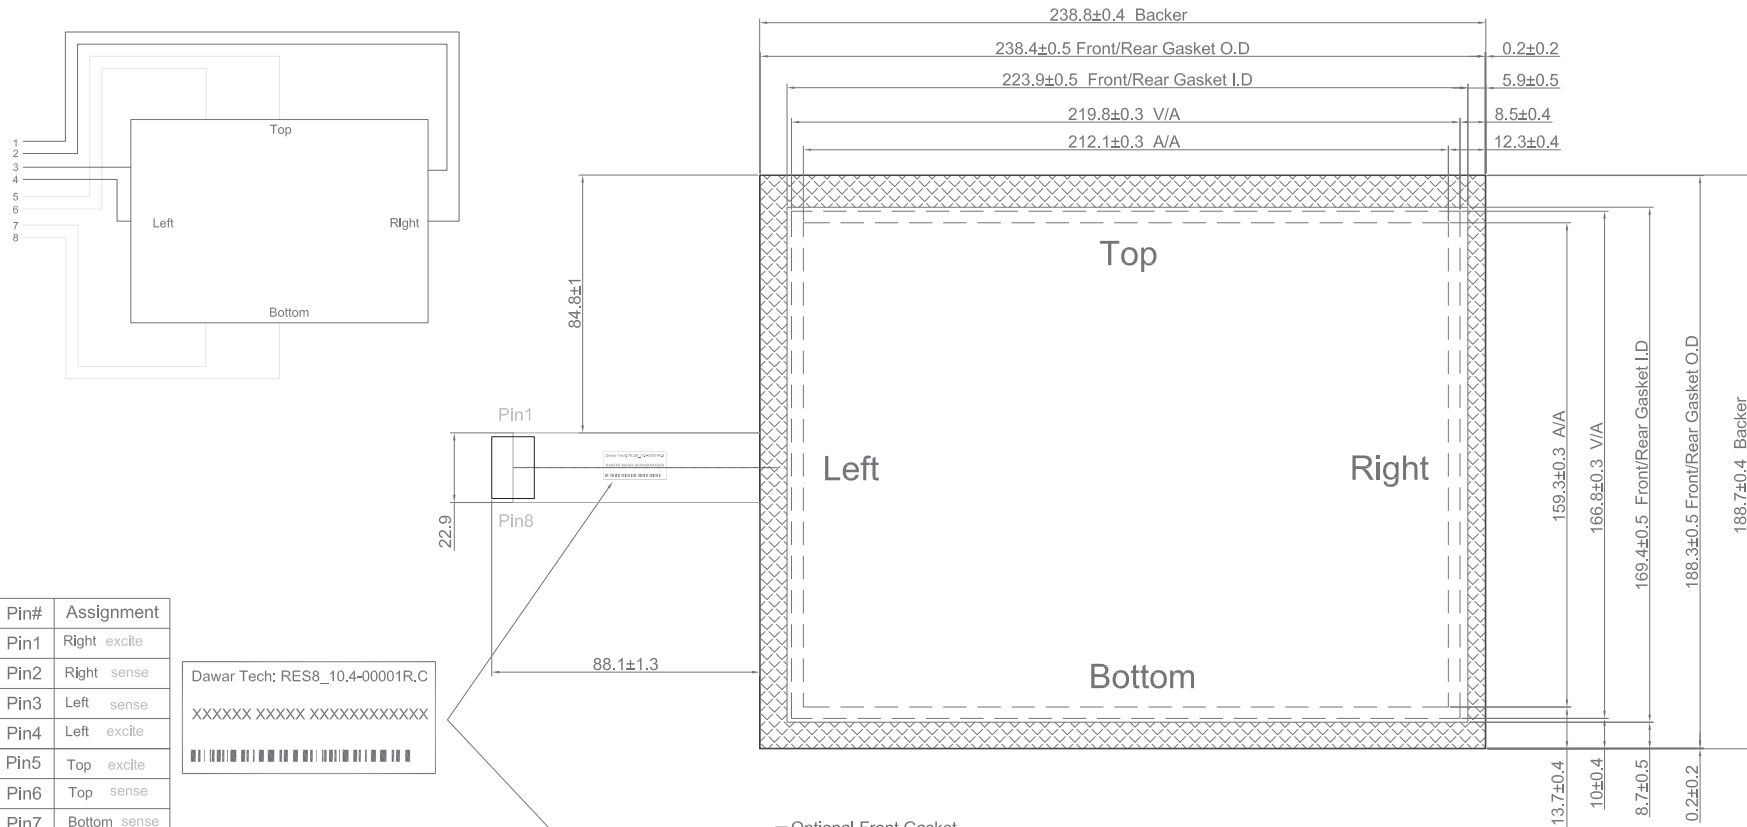

Pin#	Assignment
Pin1	Right excite
Pin2	Right sense
Pin3	Left sense
Pin4	Left excite
Pin5	Top excite
Pin6	Top sense
Pin7	Bottom sense
Pin8	Bottom excite

Dawar Tech; RES8_10.4-00001R,C
 XXXXXX XXXXX XXXXXXXXXXXXXXX

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time :>5,000,000 times.
- 3.Linearity : ≤ 1.5%.
- 4.ITO Film:Anti-glare Harding Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Glass: Sheet Resistanc:400±100 Ω/square
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	RES8_10.4-00001	C
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	09-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
10.4" 8-Wire Resistive Touch Screen	1 OF 1		