
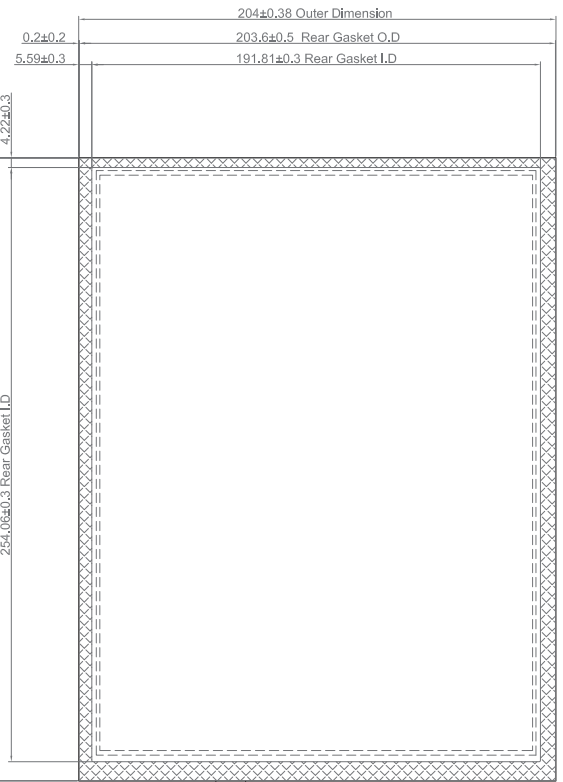
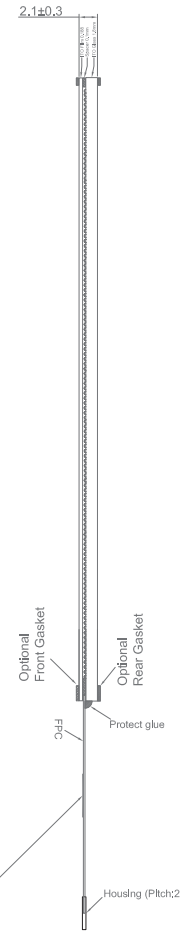



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	05-07-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

FRONT VIEW

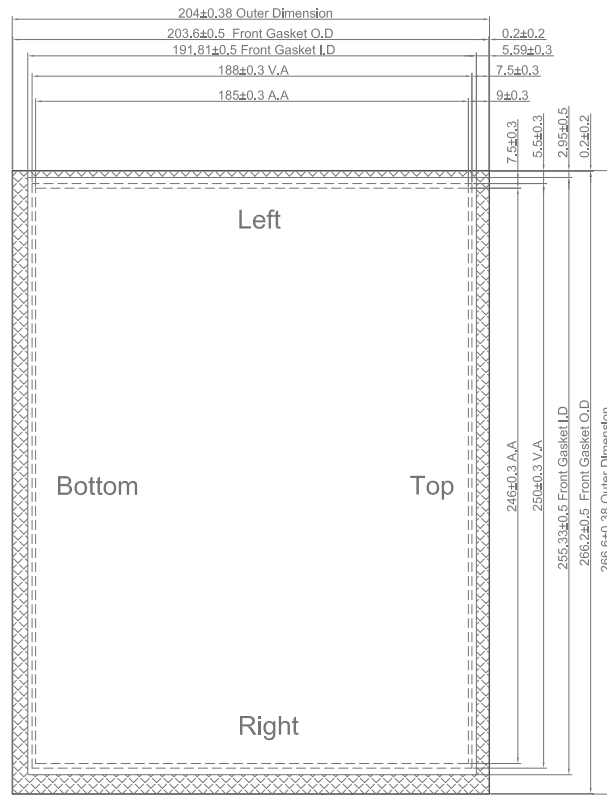

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time :>1,000,000 times.
- 3.Linearity : ≤ 1.5%.
- 4.I.TO Film:Anti-glare Harding Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Glass: Sheet Resistanc:400±100 Ω/square
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size



Dawar Tech: FG4_12.1-00001R,B
XXXXXXXX XXXXX XXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXX

Pin#	Assignment
Pin1	Bottom
Pin2	Right
Pin3	Top
Pin4	Left

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_12.1-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
12.1" 4-Wire Resistive Touch Screen	1 OF 1		