
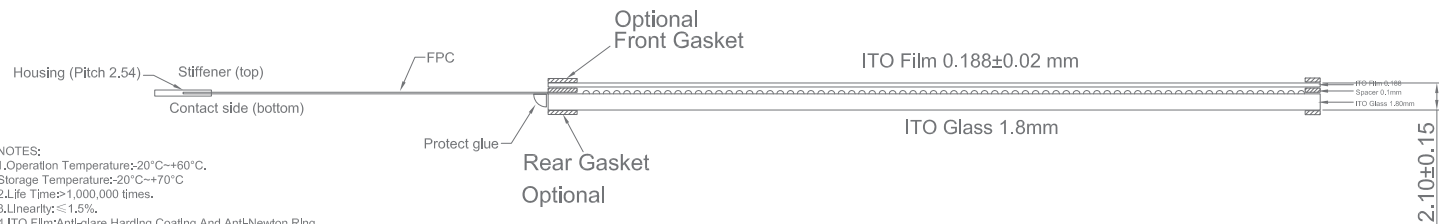


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	12-08-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

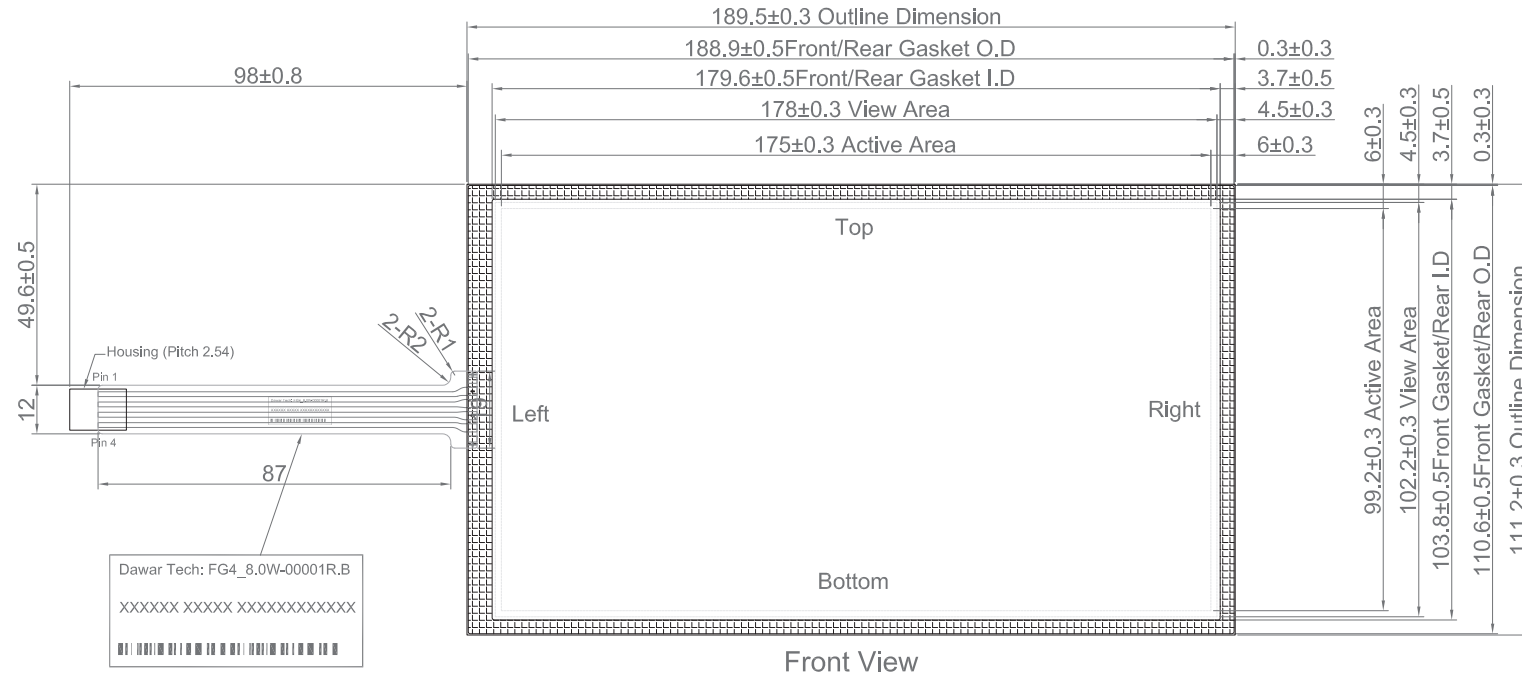

- NOTES:
1. Operation Temperature: 20°C ~ +60°C.
 2. Storage Temperature: -20°C ~ +70°C
 3. Life Time > 1,000,000 times.
 4. Life Time > 1.5%.
 5. ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
 6. ITO Film: Sheet Resistance: 400±100 Ω/square
 7. ITO Glass: Sheet Resistance: 400±100 Ω/square
 8. Tail Type: Gold plated FPC
 9. All Tolerance Without Marked: ±0.3
 10. All Materials and Components must be RoHS compliant
 11. No Material is allowed to be larger than the glass size

Pin#	Assignment
1	Left
2	Top
3	Right
4	Bottom

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1,800,366,1904 - 412,322,9900 - Fax: 412,322,9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_8.0W-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
8.0"W 4-Wire Resistive Touch Screen	1 OF 1		