
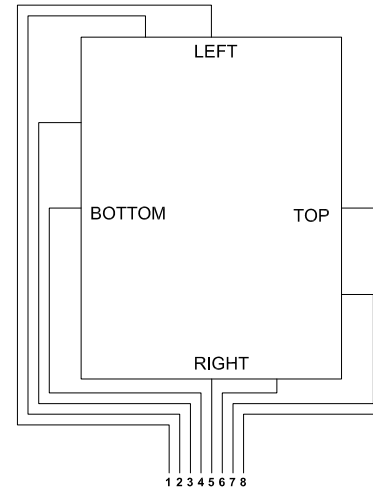
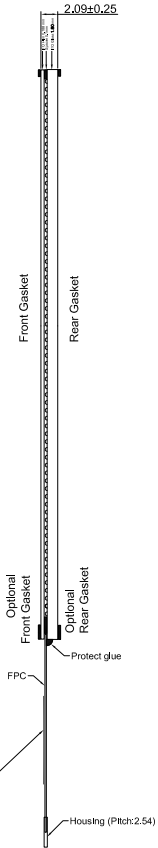



Front View

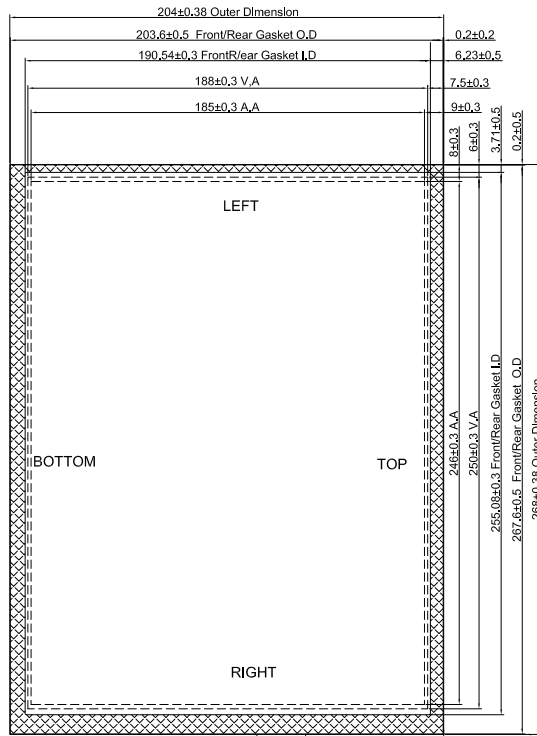

PIN #	Assignment
1	Left Excite
2	Left Sense
3	Bottom Sense
4	Bottom Excite
5	Right Excite
6	Right Sense
7	Top Sense
8	Top Excite

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time: >5,000,000 times.
- 3.Linearity: ≤ 1.5%.
- 4.ITO Film: Anati-Glare Hard Coating & Anti-Newton Ring
Sheet Resistance: 400±50Ω/square;
ITO Glass: Sheet Resistance: 400±50Ω/square
- 5.Tail Type :FPC By Golden Plated
- 6.All Tolerance Without Marked: ±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size



Dawar Tech: FG8_12.1-00001R.B
XXXXXXXX XXXXX XXXXXXXXXXXXX
[Barcode]

REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	08-23-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH



THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_12.1-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
12.1" 8-Wire Resistive Touch Screen	1 OF 1		