


REVISIONS				
REV	ECO	DESCRIPTION	DWN	DATE
A	-	Initial release.	AMH	12-05-07
B	-	Updated temp spec and labeling.	JL	08-17-09
C	-	Changed ink design.	JL	08-15-11


FRONT VIEW

Pin#	Assignment
Pin1	LEFT EXCITE
Pin2	LEFT SENSE
Pin3	TOP SENSE
Pin4	TOP EXCITE
Pin5	RIGHT EXCITE
Pin6	RIGHT SENSE
Pin7	BOTTOM SENSE
Pin8	BOTTOM EXCITE

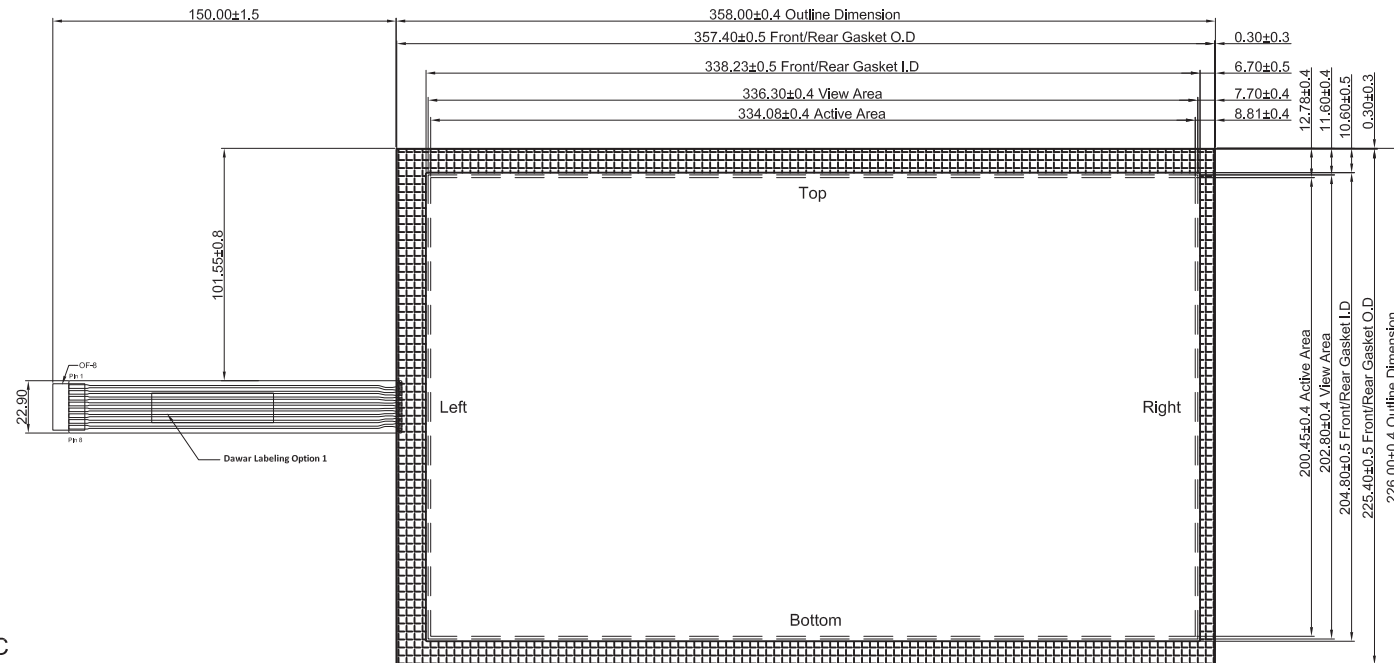

NOTES:

- Operation Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Overlay Colour :Black
- Life Time: $> 5,000,000$ times
- Linearity: $\leq 1.5\%$
- ITO Film: Anti-Glare Hard Coated & Anti-Newton Ring
Sheet Resistance: $400 \pm 100 \Omega/\text{square}$
ITO Glass: Sheet Resistance: $400 \pm 100 \Omega/\text{square}$
- Tail Type: Gold plated FPC
- Tolerances not marked: ± 0.3
- All materials and components must be RoHS compliant
- No material is allowed to be larger than the glass size except for the tail



CUSTOMER P/N	REV	DAWAR ENGINEERING P/N			REV
Standard product offering	-	FG8_15.3W-00001			C
MANUFACTURING NO.	REV	UNIT	TOLERANCE	SHEET	DRAWN BY
		mm [inch]	± 0.30 [0.010] unless specified	1 OF 1	Jason Liao
DESCRIPTION					DATE
15.3"W 8-Wire Resistive Touch Screen					08-17-09

REV	UNIT	TOLERANCE	SHEET	DRAWN BY	DATE
-	mm [inch]	± 0.30 [0.010] unless specified	1 OF 1	Jason Liao	08-17-09