


REVISIONS				
REV	ECO	DESCRIPTION	DWN	DATE
A	-	Initial release.	AMH	06-07-07
B	-	Updated temp spec and labeling.	JL	08-17-09
C	-	Changed ink design.	JL	08-15-11


### FRONT VIEW


Pin#	Assignment
Pin1	Top excite
Pin2	Top sense
Pin3	Left sense
Pin4	Left excite
Pin5	Bottom excite
Pin6	Bottom sense
Pin7	Right sense
Pin8	Right excite

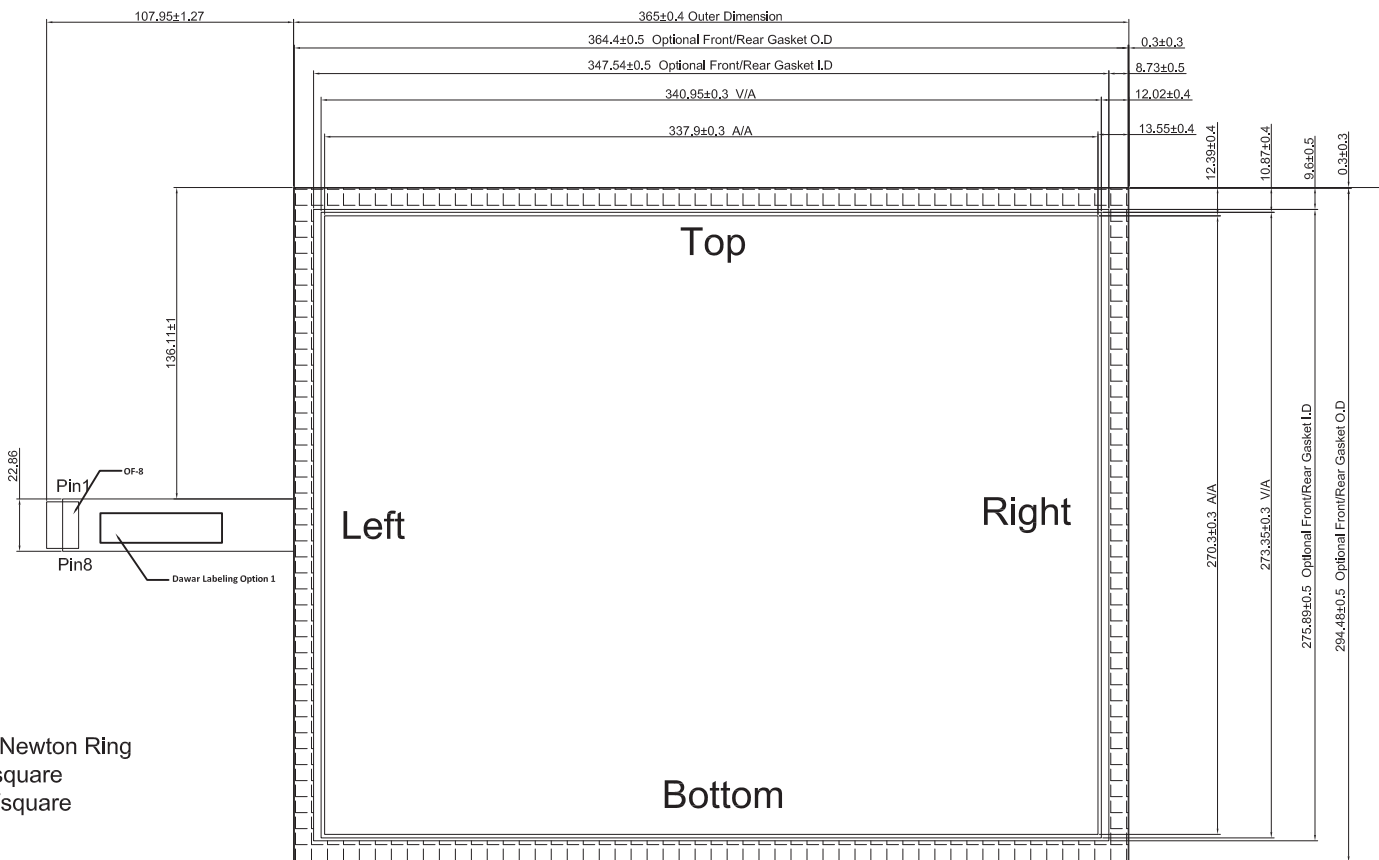

**NOTES:**

1. Operation Temperature: -20°C ~ +60°C  
Storage Temperature: -20°C ~ +70°C
2. Overlay Colour :Black
3. Life Time: >5,000,000 times
4. Linearity: ≤1.5%
5. ITO Film: Anti-Glare Hard Coated & Anti-Newton Ring  
Sheet Resistance: 400±100Ω/square  
ITO Glass: Sheet Resistanc:400±100 Ω /square
6. Tail Type: Gold plated FPC
7. Tolerances not marked: ±0.3
8. All materials and components must be RoHS compliant
9. No material is allowed to be larger than the glass size except for the tail

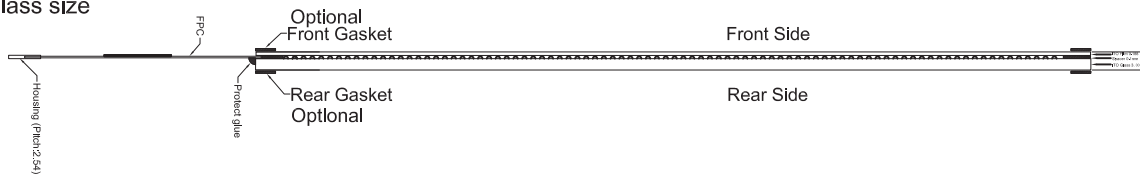

 <p>1016 North Lincoln Avenue, Pittsburgh, PA 15233 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958 e-mail: sales@dawar.com - www.dawar.com</p> <p><small>THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.</small></p>	CUSTOMER P/N Standard product offering	REV -	DAWAR ENGINEERING P/N FG8_17.0-00001				REV C
	MANUFACTURING NO.	REV	UNIT mm [inch]	TOLERANCE ±0.30 [0.010] unless specified	SHEET 1 OF 1	DRAWN BY Jason Liao	DATE 08-17-09
DESCRIPTION 17.0" 8-Wire Resistive Touch Screen							