





REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	12-08-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH



Pin Assignment


Pin#	Assignment
Pin1	LEFT EXCITE
Pin2	LEFT SENSE
Pin3	TOP SENSE
Pin4	TOP EXCITE
Pin5	RIGHT EXCITE
Pin6	RIGHT SENSE
Pin7	BOTTOM SENSE
Pin8	BOTTOM EXCITE

FRONT VIEW

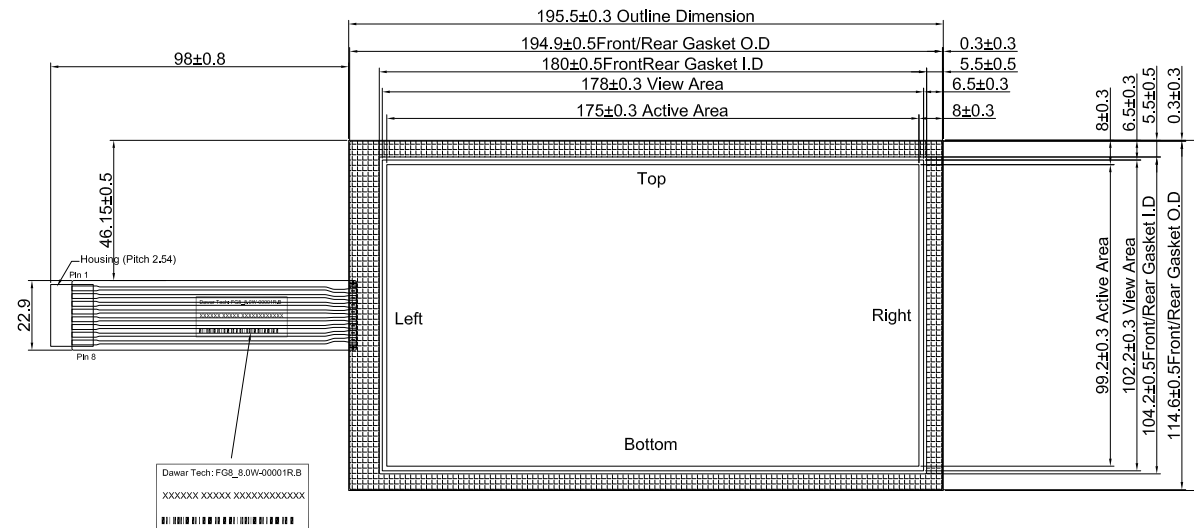

NOTES:

1. Operation Temperature: -20°C ~ +60°C
Storage Temperature: -20°C ~ +70°C
2. Life Time: >5,000,000 times.
3. Linearity: ≤ 1.5%.
4. ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Glass: Sheet Resistance: 400±100 Ω/square
5. Tail Type : Gold plated FPC
6. All Tolerance Without Marked: ±0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

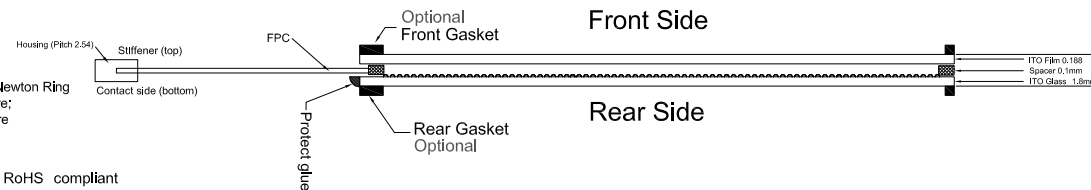

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1,800,368,1004 - 412,322,9900 - Fax: 412,322,9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_8.0W-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
8.0"W 8-Wire Resistive Touch Screen	1 OF 1		