
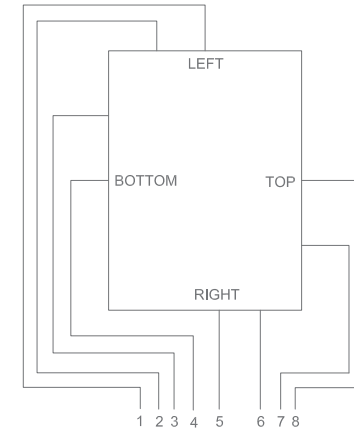


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	05-07-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

Front View

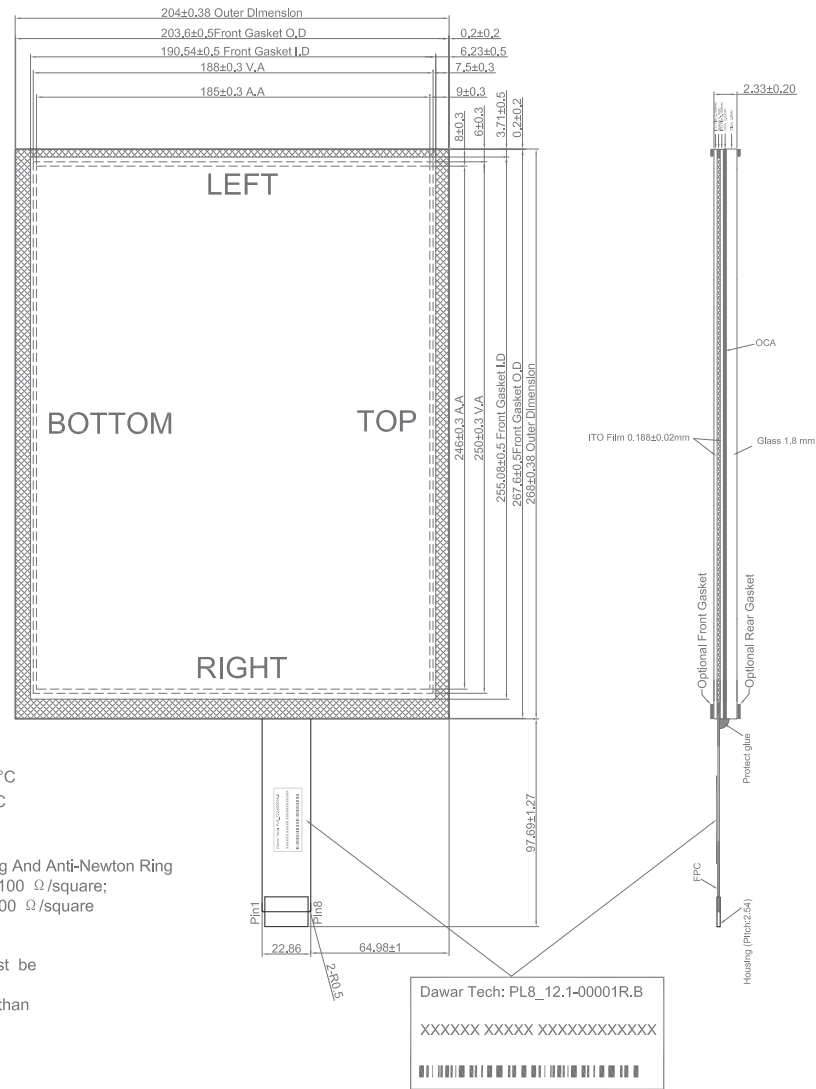

NOTES:

- Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- Life Time : >5,000,000 times.
- Linearity: ≤ 1.5%.
- ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
- ITO Glass: Sheet Resistance: 400±100 Ω/square
- Tail Type : Gold plated FPC
- All Tolerance Without Marked: ±0.3
- All Materials and Components must be RoHS compliant
- No Material is allowed to be larger than the glass size

PIN #	Assignment
1	Left Excite
2	Left Sense
3	Bottom Sense
4	Bottom Excite
5	Right Excite
6	Right Sense
7	Top Sense
8	Top Excite



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	PL8_12.1-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
12.1" 8-Wire Resistive Touch Screen	1 OF 1		