



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	05-07-09	AMH
B	Updated temp spec and labeling	08-17-09	AMH

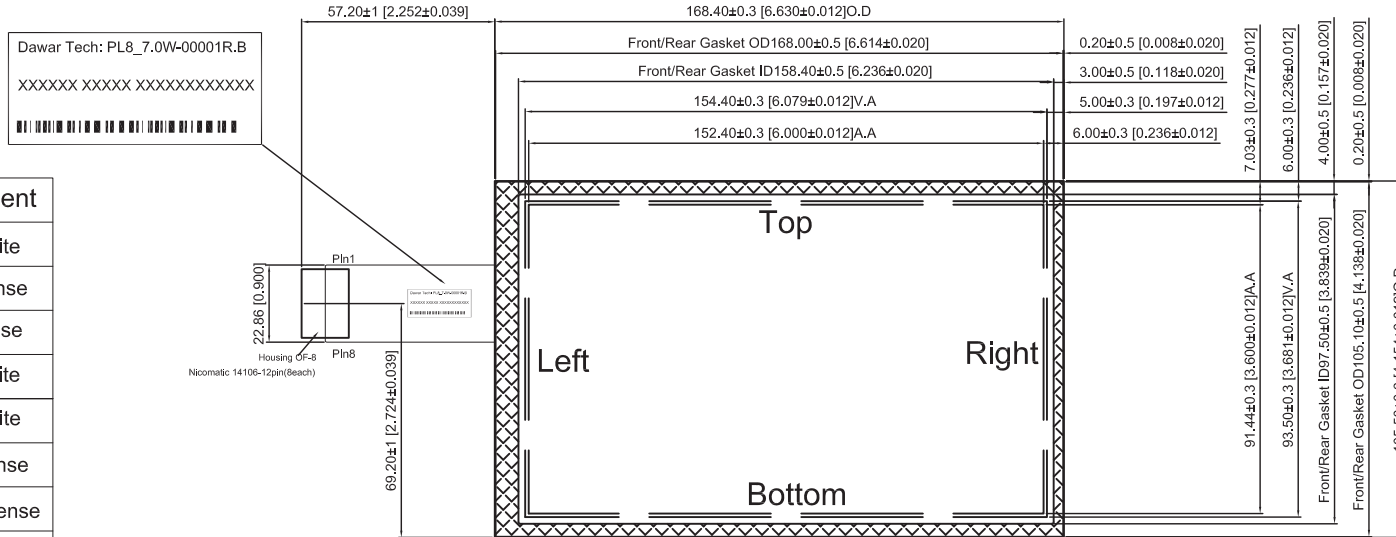

Pin#	Assignment
Pin1	Right excite
Pin2	Right sense
Pin3	Top sense
Pin4	Top excite
Pin5	Left excite
Pin6	Left sense
Pin7	Bottom sense
Pin8	Bottom excite

NOTES:

1. Operation Temperature: -20°C ~ +60°C  
Storage Temperature: -20°C ~ +70°C
2. Life Time: >5,000,000 times.
3. Linearity: ≤ 1.5%.
4. ITO Film: Anti-glare & Hardng Coating Anti-Newton Ring  
Sheet Resistance: 400±100 Ohm/square;  
ITO Film: Clear- Anti-Newton Ring  
Sheet Resistanc: 400±100 Ohm/square
5. Tail Type : Gold plated FPC
6. All Tolerance Without Marked: ±0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

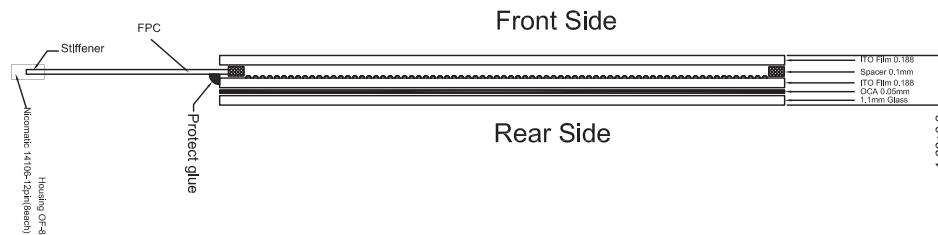

<p>1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302          1.800.366.1904 - 412.322.9900 - Fax: 412.322.9956          e-mail: sales@sawar.com - www.dawar.com</p>	CUSTOMER NAME	UNIT	DAWAR P/N	REV
	Standard product offering	mm	PL8_7.0W-00001	B
	CUSTOMER P/N	REV	DRAWN BY	DATE
			Jason Liao	08-17-09
	DESCRIPTION	SHEET	MANUFACTURING NO.	REV
	7.0"W 8-Wire Resistive Touch Screen	1 OF 1		

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.