



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	10-23-09	AMH

Pin#	Assignment
Pin1	Right excite
Pin2	Right sense
Pin3	Bottom sense
Pin4	Bottom excite
Pin5	Left excite
Pin6	Left sense
Pin7	Top sense
Pin8	Top excite

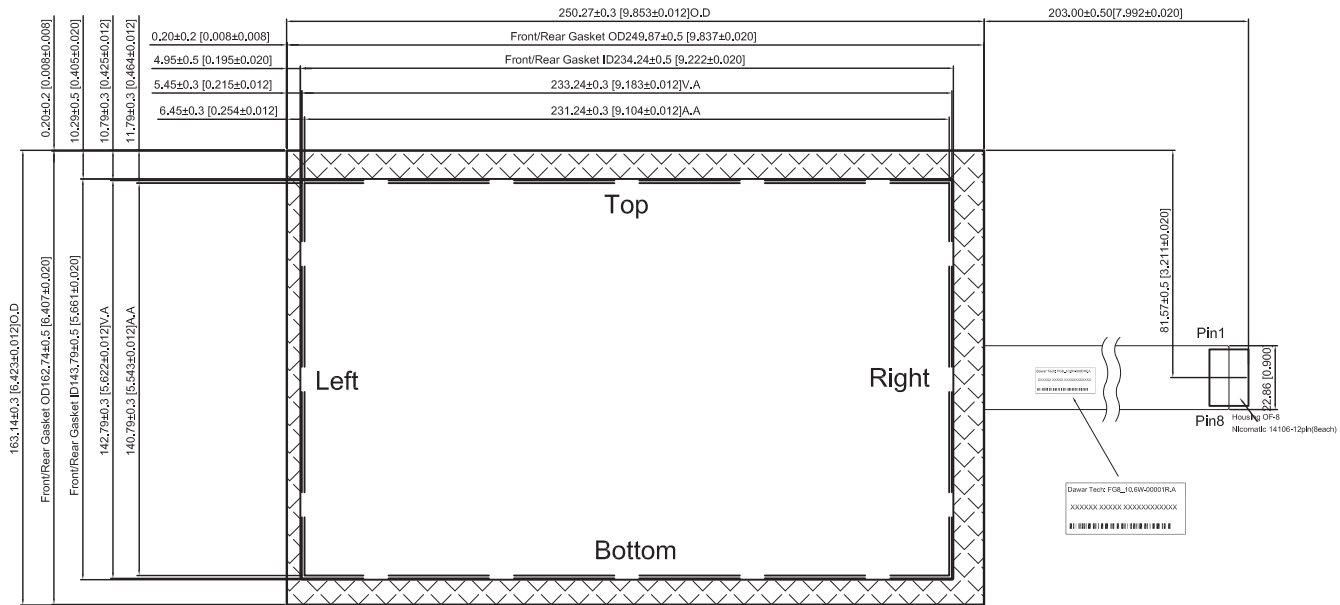

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time :>5,000,000 times.
- 3.Linearity : ≤1.5%.
- 4.ITO Film:Anti-glare Harding Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Glass: Sheet Resistanc:400±100 Ω/square
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size

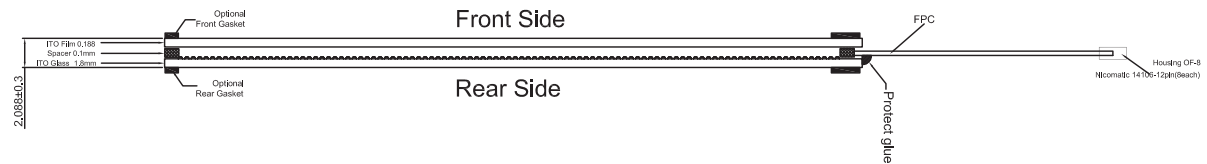

DawarTouch
 1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1,800,368,1004 - 412,322,9900 - Fax: 412,322,9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_10.6W-00001	A
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	10-23-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
10.6" 8-Wire Resistive Touch Screen	1 OF 1		